


# 鉄筋コンクリート特殊L形及び縁塊(鉄筋コンクリートU形ふた掛け用)

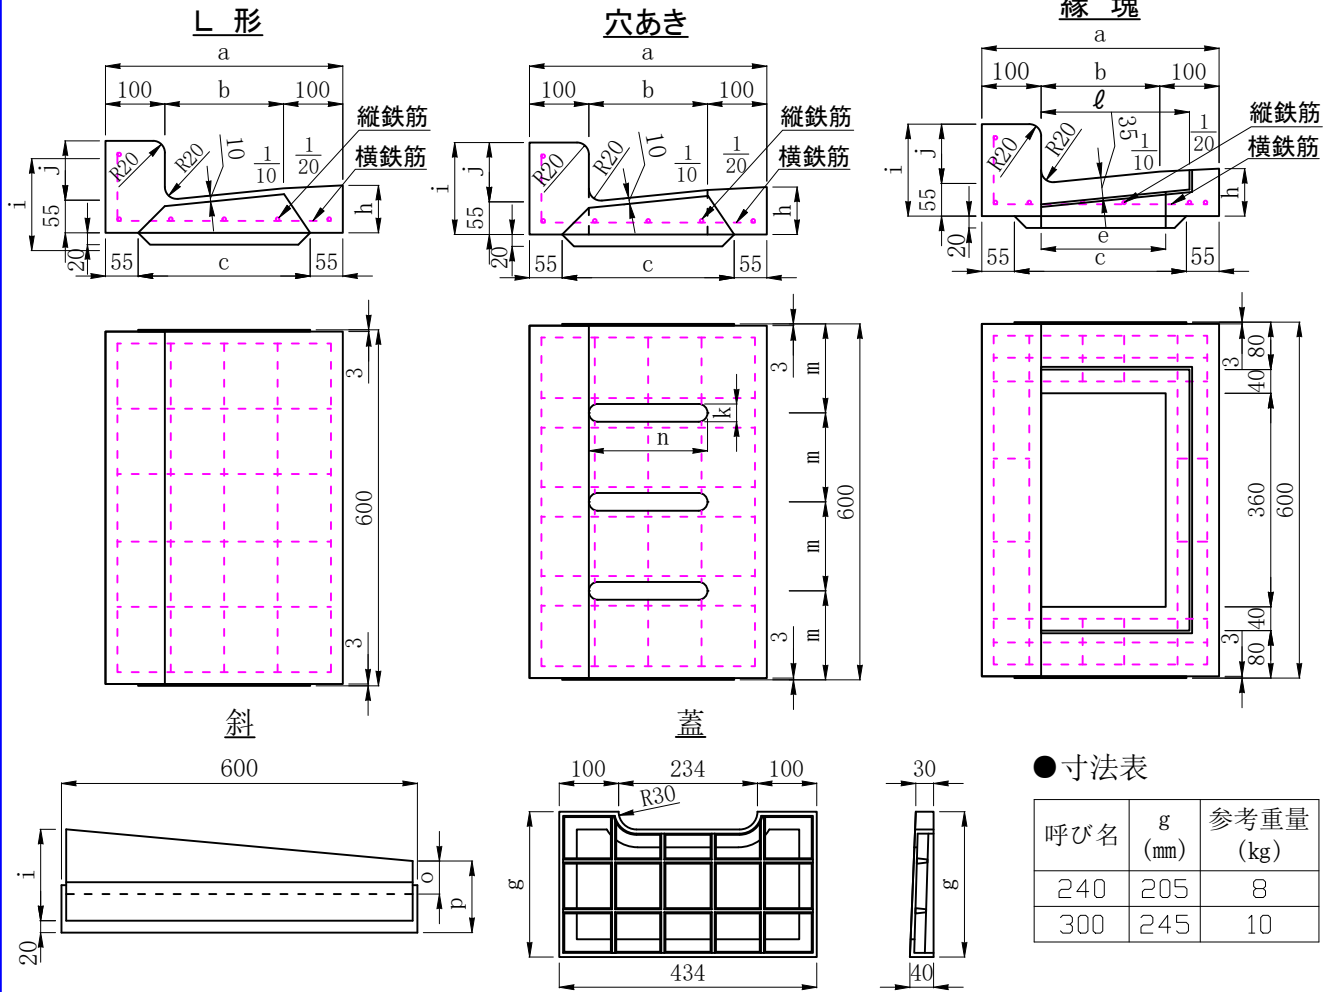

●寸法表

呼 び	寸 法 (mm)													鉄 筋				参考重量 (kg)
	a	b	c	e	h	i	j	k	ℓ	m	n	o	p	縦鉄筋 径(mm)	本数	横鉄筋 径(mm)	本数	
L形	240	340	140	230	—	74	155	100	—	—	—	—	—	6	6	6	6	45
	240(2cm切下)	340	140	230	—	74	75	20	—	—	—	—	—	6	6	6	6	38
	240(5cm切下)	340	140	230	—	74	105	50	—	—	—	—	—	6	6	6	6	43
	240(2cm斜)	340	140	230	—	74	155	100	—	—	—	20	75	6	6	6	6	47
	240(5cm斜)	340	140	230	—	74	155	100	—	—	—	50	105	6	6	6	6	44
	240(5cm~2cm斜)	340	140	230	—	74	105	50	—	—	—	20	75	6	6	6	6	40
	300	400	200	290	—	80	155	100	—	—	—	—	—	6	6	6	6	52
	300(2cm切下)	400	200	290	—	80	75	20	—	—	—	—	—	6	6	6	6	45
	300(5cm切下)	400	200	290	—	80	105	50	—	—	—	—	—	6	6	6	6	49
	300(2cm斜)	400	200	290	—	80	155	100	—	—	—	20	75	6	6	6	6	49
穴あき	240	340	140	230	—	74	155	100	30	—	150	140	—	6	6	6	8	42
	240(2cm切下)	340	140	230	—	74	75	20	30	—	150	140	—	6	6	6	8	35
	240(5cm切下)	340	140	230	—	74	105	50	30	—	150	140	—	6	6	6	8	35
	300	400	200	290	—	80	155	100	30	—	150	200	—	6	6	6	8	49
	300(2cm切下)	400	200	290	—	80	75	20	30	—	150	200	—	6	6	6	8	42
	300(5cm切下)	400	200	290	—	80	105	50	30	—	150	200	—	6	6	6	8	46
縁塊	240	340	140	230	170	74	155	100	—	210	—	—	—	6	7	6	8	35
	240(2cm切下)	340	140	230	170	74	75	20	—	210	—	—	—	6	7	6	8	24
	240(5cm切下)	340	140	230	170	74	105	50	—	210	—	—	—	6	7	6	8	28
	300	400	200	290	210	80	155	100	—	250	—	—	—	6	7	6	8	41
	300(2cm切下)	400	200	290	210	80	75	20	—	250	—	—	—	6	7	6	8	30
	300(5cm切下)	400	200	290	210	80	105	50	—	250	—	—	—	6	7	6	8	26