


L形側溝 (JIS A 5372)

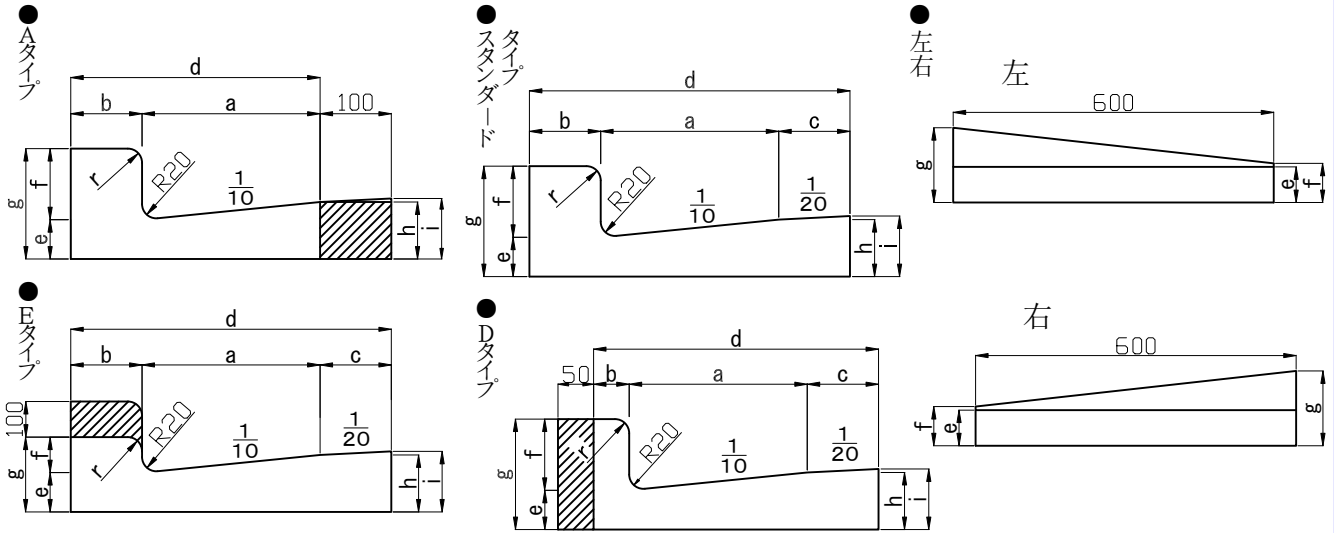

●寸法表

線種	寸法 (mm)											配筋				参考重量 (kg)	曲げひび割れ耐力 kN·m
	呼び	a	b	c	d	e	f	g	h	i	r	縦鉄筋		横鉄筋			
												径 (mm)	数量 (本)	径 (mm)	数量 (本)		
250A	250	100	—	350	55	100	155	80	—	20	600	4	4	4	5	44	1.187
250AE(5cm)	250	100	—	350	55	50	105	80	—	20	600	4	4	4	5	37	
250A左右(5cm)	250	100	—	350	55	100 50	155 105	80	—	20	600	4	4	4	5	42	
250AE(2cm)	250	100	—	350	55	20	75	80	—	20	600	4	4	4	5	33	
250A左右(2cm)	250	100	—	350	55	100 20	155 75	80	—	20	600	4	4	4	5	39	
250B	250	100	100	450	55	100	155	80	85	20	600	4	5	4	5	56	1.487
250BE(5cm)	250	100	100	450	55	50	105	80	85	20	600	4	5	4	5	51	
250B左右(5cm)	250	100	100	450	55	100 50	155 105	80	85	20	600	4	5	4	5	53	
250BE(2cm)	250	100	100	450	55	20	75	80	85	20	600	4	5	4	5	47	
250B左右(2cm)	250	100	100	450	55	100 20	155 75	80	85	20	600	4	5	4	5	52	
250B左右(5→2cm)	250	100	100	450	55	50 20	105 75	80	85	20	600	4	5	4	5	47	
250D	250	50	100	400	55	100	155	80	85	20	600	4	5	4	5	46	
250DE(5cm)	250	50	100	400	55	50	105	80	85	20	600	4	5	4	5	42	
250D左右(5cm)	250	50	100	400	55	100 50	155 105	80	85	20	600	4	5	4	5	44	
250DE(2cm)	250	50	100	400	55	20	75	80	85	20	600	4	5	4	5	38	
250D左右(2cm)	250	50	100	400	55	100 20	155 75	80	85	20	600	4	5	4	5	42	
250D左右(5→2cm)	250	50	100	400	55	50 20	105 75	80	85	20	600	4	5	4	5	38	
300A	300	100	—	400	55	100	155	85	—	20	600	4	4	4	6	50	
300AE(5cm)	300	100	—	400	55	50	105	85	—	20	600	4	4	4	6	43	
300	300	100	100	500	55	100	155	85	90	20	600	4	5	4	6	62	1.600
300E(5cm)	300	100	100	500	55	50	105	85	90	20	600	4	5	4	6	57	
300E左右(5cm)	300	100	100	500	55	100 50	155 105	85	90	20	600	4	5	4	6	59	
300E(2cm)	300	100	100	500	55	20	75	85	90	20	600	4	5	4	6	52	
300左右(2cm)	300	100	100	500	55	100 20	155 75	85	90	20	600	4	5	4	6	58	
300左右(5→2cm)	300	100	100	500	55	50 20	105 75	85	90	20	600	4	5	4	6	56	
300D	300	50	100	450	55	100	155	85	90	20	600	4	5	4	6	52	
300DE(5cm)	300	50	100	450	55	50	105	85	90	20	600	4	5	4	6	48	
350	350	100	100	550	55	100	155	90	95	20	600	4	5	6	5	69	1.687
350E(5cm)	350	100	100	550	55	50	105	90	95	20	600	4	5	6	5	61	
350左右(5cm)	350	100	100	550	55	100 50	155 105	90	95	20	600	4	5	6	5	66	